Premask & Prespacing Tapes

HEAVY WEIGHT
PREMIUM PAPER

RTAPE.COM



Always lays flat, with no edge curling, wrinkling or tunneling.

Premask is a heavy weight paper tape with low to medium tack. It covers a one piece printed vinyl graphic and protects during storage, transport and handling.
Prespacing is heavyweight paper tape used to mask die cut graphics. It holds cut vinyl lettering and emblems together during installation.

PREMASKS

4760 Medium Tack

Premask/prespacing tape for UV and solvent-based screen print inks and clear coats.

PRESPACING TAPES

4885 Extra High Tack

Prespacing tape for difficult to transfer graphics, thermal die-cut and textured window graphics.

4761RLA High Tack

Prespacing tape for Air Egress Vinyls. Designed for use with die cut and plotter cut graphics. Conform® Release Liner Adhesion prevents tunneling and edge curl.

4775RLA High Tack

Prespacing tape for small and medium die cut graphics, Compatible with most vinyl films and graphics with overlaminates. Conform® Release Liner Adhesion prevents tunneling and edge curl.

Applications

One piece printed graphics
Wall graphics
Decals
Banners

Product Information

RLA® Release Liner Adhesion

Lays flat with no tunneling or edge curling

Factory cut, razor slit rolls

- No adhesive balls, gapping between layers or crushed edges
- Tears cleanly ... no stringy, legging adhesive
- Multiple roll widths available

No adhesive build-up on stored graphics

Works in either wet or dry applications

MAN print & sign


MAN PRINT & SIGN B.V.
G.G. Schipperstraat 26
1483 GE, De Rijp

T: 0031-(0)299-393390
sales@manprint-sign.nl
www.manprint-sign.nl

Premask & Prespacing Tapes

HEAVY WEIGHT
PREMIUM PAPER

RTAPE.COM

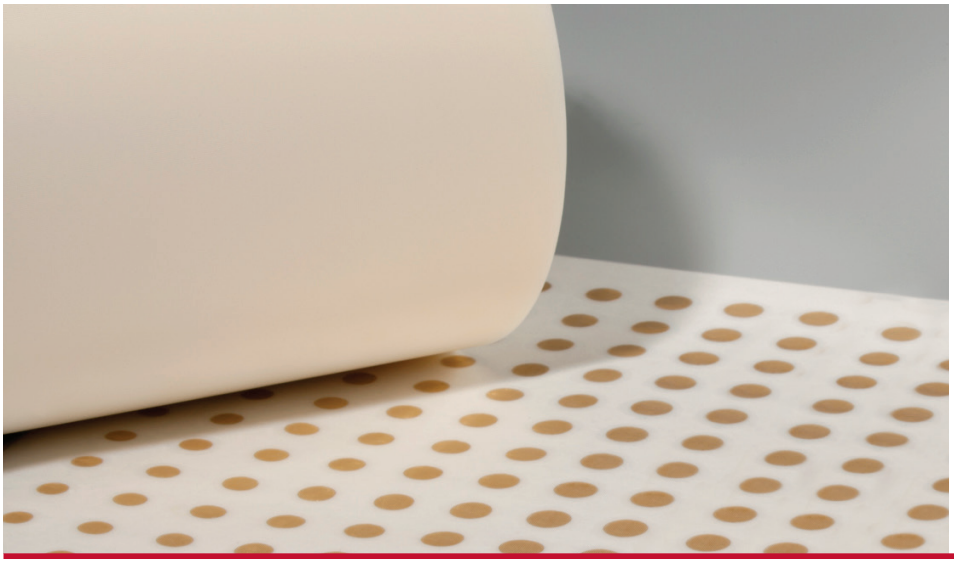



Printed on Digital Coated 80# cover on a Ricoh C751EX

TECHNICAL DATA

Physical Properties	
Adhesive	Rubber-based
Color	Off White/Translucent
Tensile	297 N/100 mm (17lb./in)
Elongation	3-4%
Tear Resistance	50
Shelf Life	1 year

	4760	4885	4761RLA	4775RLA
Caliper	4.3 mil	4.3 mil	4.3 mil	4.3 mil
Tack Level	Medium	Very High	High	High
Adhesion to Steel*	13 - 15 oz N/100 mm	20+ oz N/100 mm	14 - 17 oz N/100 mm	15-18 oz N/100 mm
Roll Size				
24"	•		•	•
36"	•		•	•
48"	•	•	•	•
54"	•			

*** TEST METHOD:** PSTC-101

WARRANTY Tapes are only warranted to be free of defects in workmanship or materials at time of shipment. RTape will replace or credit any material deemed to be defective. No acceptance or responsibility for loss, damage, or expense, implied or otherwise, shall be assumed by the seller or manufacturer. The end user assumes all risk and liability.

MAN print & sign

MAN PRINT & SIGN B.V.
G.G. Schipperstraat 26
1483 GE, De Rijp

T: 0031-(0)299-393390
sales@manprint-sign.nl
www.manprint-sign.nl